


POG-AR-350-450

Characteristics

Theoretical data

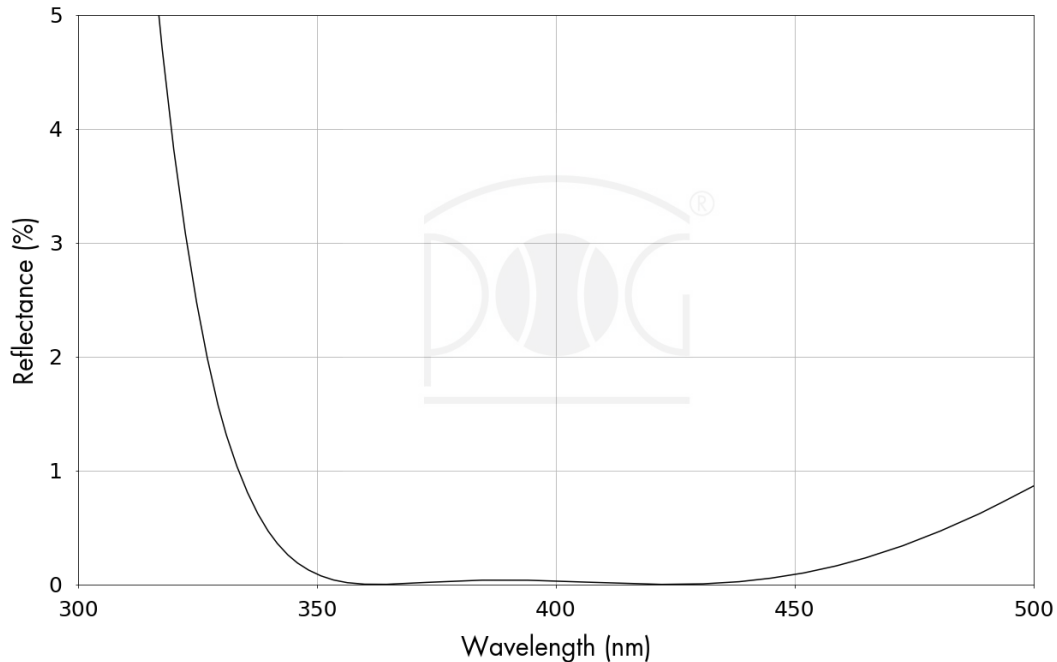

Specification

$R(\text{abs}) < 0.6\% @ 350 \dots 450 \text{ nm}, \text{AOI} = 0 \dots 15^\circ$

Substrate

Optical glasses, fused silica

Description/ Application

Antireflection coating for near UV from 350 to 450 nm.

Durability

Adhesion	Mil-C 48497A 4.5.3.1
Moderate abrasion	Mil-C 48497A 4.5.3.3
Humidity	Mil-C 48497A 4.5.3.2
Temperature	Mil-C 48497A 4.5.4.1