


POG-AR-450-700

Characteristics

Theoretical data

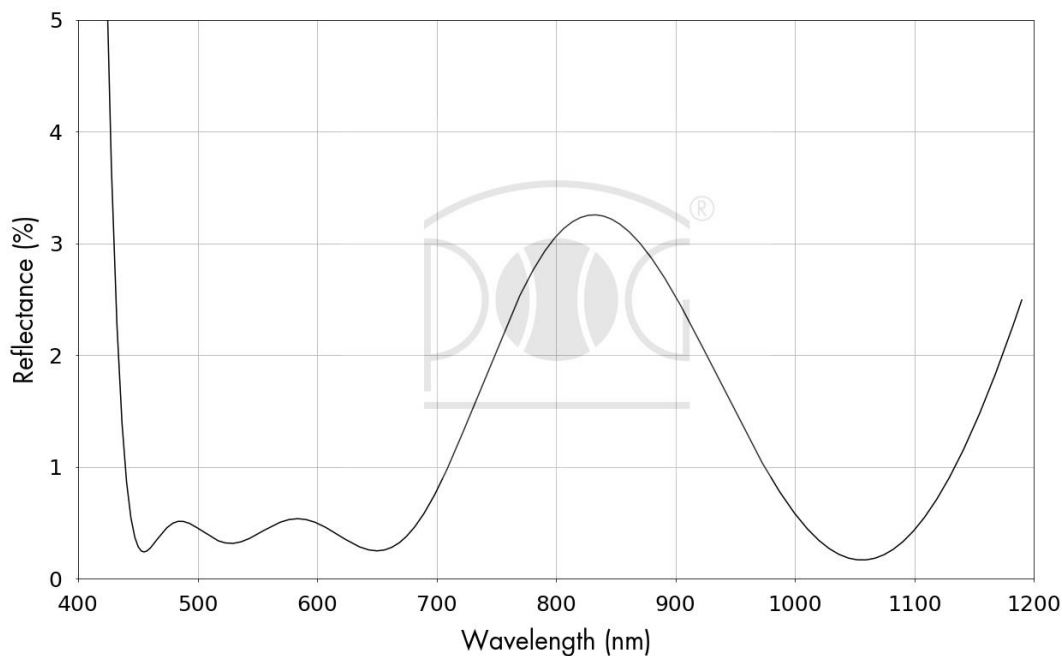

Specification

R(abs) @ 450-700nm < 1%
R(abs) @ 1064nm < 0,5%

Substrate

Optical glasses, fused silica

Description/ Application

Broadband antireflection coating with high transmission in the visible range and on a specific wavelength. Other wavelengths on request.

Durability

Adhesion	Mil-C 48497A 4.5.3.1
Moderate abrasion	Mil-C 48497A 4.5.3.3
Humidity	Mil-C 48497A 4.5.3.2
Temperature	Mil-C 48497A 4.5.4.1